

# Plastic Extruders Limited

Russell Gardens, Wickford, Essex, SS11 8DN England.  
Tel: +44(0)1268 577800 Fax: +44(0)1268 560027  
Sales Tel: +44(0)1268 571116  
www.plastex.co.uk e-mail: sales@plastex.co.uk



October 2006

## Herontred Installation Notes

### Preparation


- Confirm that door clearances are sufficient for the height of the tiles.
- Herontred should only be installed once all construction and painting work has taken place so as to prevent it becoming damaged or dirtied.
- Read completely through these installation instructions before commencing.
- Unpack and inspect all materials to ensure they are free from transport damage
- During installation, avoid rough handling and using excessive force when joining tiles together as this may cause them to buckle at a later date.

### Equipment required:

- Herontred vulcanised rubber tiles (supplied).
- Male/Female edging strips (supplied as required).
- Skirting Strips and corners (supplied as required).
- Straight edge
- Utility Knife
- Marker pen (used to mark tile when cutting pieces to size).

### Installing Herontred

- Herontred tiles have easy to use push-fit male/female connectors, allowing for quick and easy installation.
- Made from a non-porous material, the floor tiles provide a virtual seal and so prevent the evaporation of moisture from beneath.

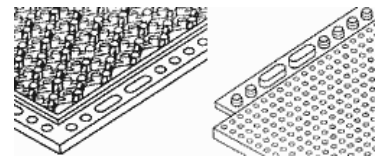

For ground floor level installations Herontred should be laid on top of two layers of clear plastic sheeting, sealed at the seams.

- It is very important to ensure that a gap of 1cm is left at the perimeter between any walls and the tiles edge. Failure to do so may cause the tiles to buckle due to stresses associated with slight movements.
- Start in one corner and work outwards. Avoid forcing the tiles together. They should be loose laid and will run in straight lines.
- After installation, cover the perimeter gap with skirting strips, either those supplied or that available locally.
- At door ways or on exposed edges, edging strips are available;  
Type 1 = Female & Type 2 = Male



The edge sections also act to further hold the tiles together so connect across 2 tiles. Corner sections are available but can also be fabricated on site by mitring and super gluing cut seam together.