



HERON Tred[®]

PRODUCT CODE: HTD

Vulcanised Rubber Tiles

Slip resistant, shock absorbing floor covering



Available with dimpled texture surface...



HeronTred is an ideal safe loose lay floor covering for exercise rooms, creches and inside play areas. The 16mm vulcanised rubber tiles interlock to provide an excellent cushioning surface that protects any hard ceramic, parquet or concrete sub floor.

HeronTred's non porous composition prevents dirt and wet seeping into it, ensuring a clean hygienic floor covering. It also insulates from any cold below. Both wear surfaces provide good slip resistance whilst being comfortable to barefoot traffic.

or marblised wear surface





HERON Tred

Ancillaries

RAMPED EDGING

Two versions, female or male, available in 35cm lengths for finishing tile edges. Black and grey ex-stock, other colours available on request.



TYPE 1 (female)
EDGE/HTD-1-GRY OR BLK




TYPE 2 (male)
EDGE/HTD-2-GRY OR BLK



SKIRTING STRIP

SKIRTING & CORNERS

For use around perimeter walling for additional cushioning. Black and grey ex-stock, other colours available on request.

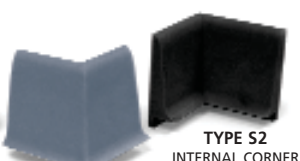


TYPE S1
EXTERNAL CORNER

TYPE S2
INTERNAL CORNER




Detailed installation guidance for Herontred and ancillaries are available on request.

Product name	Height	Size	Quantity/Description
Herontred Tile	16mm	35 x 35 cm	9 tiles per pack
Ramped edging	16mm	35cm lengths	Type 1 (Female) & Type 2 (Male)
Skirting strip	68mm	35cm lengths	Available per strip
Skirting corners	68mm	55mm returns	Type S1 (Ext) & Type S2 (Int)

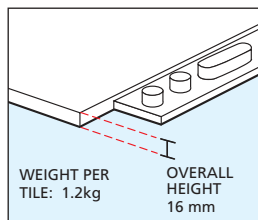


Standard Colours Dimpled surface

It is recommended to avoid light colours in heavy traffic areas. Other colours available on request

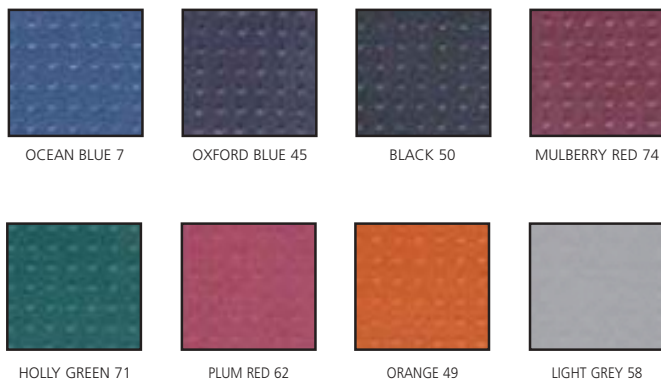

Standard Colours Marblised surface

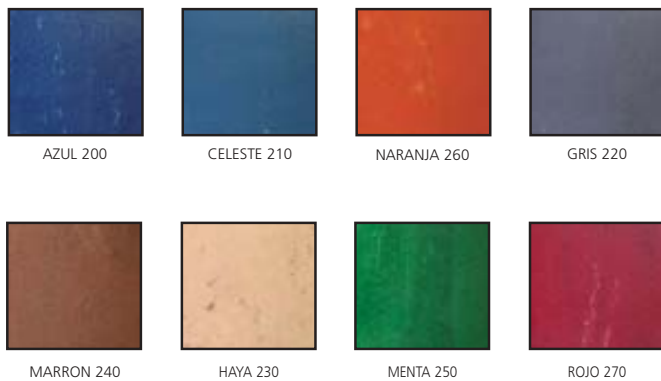

INTERIOR DESIGN

Herontred can be used in any combination of colours and surfaces for enhancing or delineating floors and corridors!

Due to limitations of the printing process, actual colours shown may vary.




Plastic Extruders Limited

Russell Gardens, Wickford, Essex, SS11 8DN England
Tel: +44 (0)1268 571116 Fax: +44 (0)1268 560027
e-mail: sales@plastex.co.uk www.plastex.co.uk



KEY FEATURES

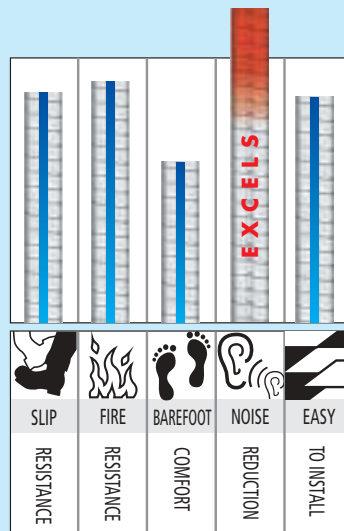

SLIP	FIRE	BAREFOOT	NOISE	EASY
RESISTANCE	RESISTANCE	COMFORT	REDUCTION	TO INSTALL

ADDITIONAL BENEFITS

- Impact absorbing
- Bevelled edges & protective skirting
- Available in two surface finishes in a choice of bright stable colours
- Easy to clean

TECHNICAL DATA

- ACOUSTIC**
ISO 140-8: 1998 25dB
- FIRE**
UNE 23727-90-Class M3
Cigarette burn resistance - Class 2; EN 1399
- IMPACT ABSORBING**
UNE 41958 IN=40%
Playground surfacing; EN 1177:1997=0.51m height
- COMPRESSION**
UNE 53-511; 25%

WHY USE HERONTRED?

- AT A GLANCE:
- Easy to install
- Selection of bright colours
- Effective covering of large hard sub floor areas



www.herontred.com