

# FLEXI RIDGE

## Hard wearing ribbed matting

For component protection and dispersion of light spillages.

Scuff resistant flooring or bench top matting with high component and noise protection featuring easy to clean ridges to enhance resilience and disperse light spillages, in a one piece homogenous roll.



### BENEFITS

- Good slip and wear resistance
- Chemical, oil and acid resistant
- Easy to cut on site, contours to uneven surfaces
- Quick to install
- Fire resistant

### FEATURES

- Ribbed surface
- Vinyl sheets in roll format
- Made from flexible PVC
- Supplied in convenient roll formats
- EN 13501 - 1 : 2007- Bfl - S1

### STANDARD COLOURS



GREEN



DARK GREY



### STANDARD SIZES


PRODUCT	HEIGHT	STANDARD ROLL OPTION
Flexi Ridge	2.8mm (7/16")	20 x 1m (65'7" x 3'3")

# PRODUCT DATA SHEET: Flexi Ridge

Apr-17

## SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (mm)	Lengths (m)	Widths (cm)	Weight (kg/m <sup>2</sup> )
Flexi Ridge	2.8	20	100	2.45

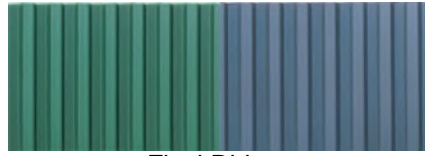

Flexi Ridge

## GENERAL

APPEARANCES	Hard wearing ribbed pattern on a continuous sheet format.
COLOURS	Green, Dark Grey
DURABILITY	Continuous extruded sheet with high scuff resistance.
WORKABILITY	Available in rolls for ease of installation. Easy to cut to size and shape.
USES	Indoor or outdoor use for floor protection and floor enhancement.

## TECHNICAL DATA

CHEMICAL	Resistant to most acids, alkalines and oils. For specific chemical resistances, <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf</a>
COMPOSITION	Flexible DINP plasticised Polyvinyl Chloride (PVC).
FIRE	EN ISO 13501 - I : 2007 - Bfl - S1
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf</a>
THERMAL	Functional -23 <sup>0</sup> C +60 <sup>0</sup> C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistant to PVC degradation; uncoloured PVC material - BS EN 607 = Delta E 1.02.
WARRANTY	1 year. See <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf</a>



Plastic Extruders Ltd, Russell Gardens, Wickford, SS11 8DN, UK  
Tel: +44(0)1268 571116

Web: [www.plastexmatting.com](http://www.plastexmatting.com)