

FLOORLINE

Light, economical and comfortable

Economical and multi-purpose, Floorline matting has wide ranging uses in light industrial and commercial applications where an attractive, slip resistant and cushioned matting is required.

The cushioning effect of Floorline reduces the risk of damage to items that are accidentally dropped while its open grid format dissipates spillages and permits easy drainage.

This effective combination makes Floorline a popular matting for clubs, restaurants, bars and hospitality areas where staff have to stand, spills are likely and breakages possible.




BENEFITS

- Certified slip resistance DIN 51130:R11 & C ASTM 1677: 1.0/0.8
- Excellent drainage DIN 51130:V10
- Easy to clean
- Easy to cut on site, contours to uneven surfaces
- Quick to install
- UV resistant
- Fire resistant
- Enhanced branding or styling


FEATURES

- Etched pattern
- Open grid construction
- Non-porous PVC (impermeable to fluids)
- Made from flexible PVC
- Supplied in 33' (10m) rolls
- Can be used indoor or outdoor*
- Certified EN 13501: Cf1 - S1
- 5 standard colors


STANDARD COLORS




RED*




BLUE



GREEN



BEIGE



WHITE


Other colors available on request.

* Red color is not colorfast in direct sunlight.

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTIONS**	
Floorline	1/4" (6mm)	2' x 33' (0.6 x 10m)	3' x 33' (0.91 x 10m)

**Contact us for custom dimensions.

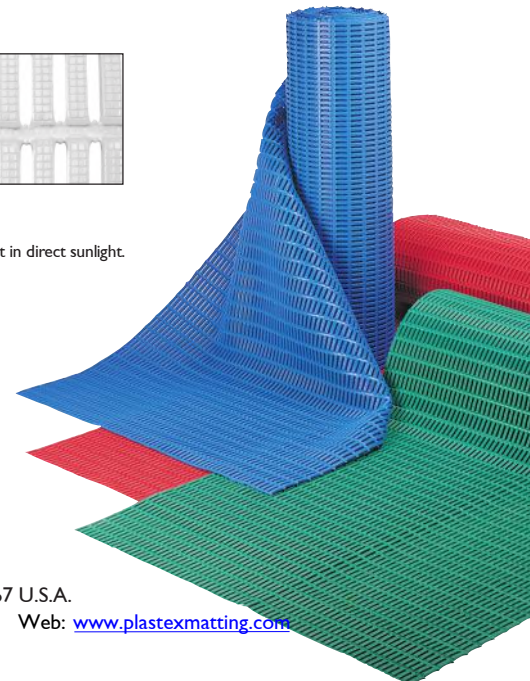


Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com

PRODUCT DATA SHEET: Floorline

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (in)	Length (ft)	Widths (ft)		Weight (lbs/sq.ft)
<i>Tolerances</i>	+/- 0.05"	0+1.0'	+/- 1/2"		
Floorline	1/4"	33'	2'	3'	0.76



GENERAL

APPEARANCES

Open grid "duckboard" design with hollow cushioned surface.

COLORS

Available in homogenous standard colors: Red, Blue, Green, Beige and White. Red color is not colorfast in direct sunlight. Other colors available upon request.

DURABILITY

One piece welded construction for maintenance free life.

WORKABILITY

Flexible construction is easy to cut and shape on site. Supplied in rolls with top ribs facing outwards. Requires inverting once rolled out prior to use.

USES

All locations, both indoor and outdoor. Red color is not colorfast in direct sunlight.

TECHNICAL DATA

ACOUSTIC

Excellent sound absorption properties.

CHEMICAL

Resistant to most acids, alkalines and oils (for specific chemical resistances, see www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf)

COMPOSITION

Flexible Polyvinyl Chloride (PVC)

ENVIRONMENT

It has been determined under the guidelines for the State of California Safe Drinking Water and Toxic Enforcement Act of 1986 (Prop 65), that no warning labels or information provision are required for Floorline.

Plastex does not use any substances currently included in the SVHC (Substances of Very High Concern) list under R.E.A.C.H.* in any matting products. All PCV grid products are 100% recyclable.

* Registration, Evaluation, Authorization and Restriction of Chemical substances

FIRE

DIN 4102 Part I - Classification B2
BS 2782 Part I, method 140A: 1992 (ISO 1210: 1992)

HYGIENE

Non-porous 100% Virgin PVC - Inhibits the growth of bacteria.

SLIP RESISTANCE

ASTM F 1677 (Dry/Wet)	1.0/0.8
DIN51130:	R11, V10
DIN51097:	Classification C

REVERSION

Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf

THERMAL

Functional -9°F +140°F (slight size variation may occur at temperature extremes).

UV LIGHT

Resistant to PVC degradation.

WARRANTY

1 year. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf



Plastex Matting Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com