


HERONAIR

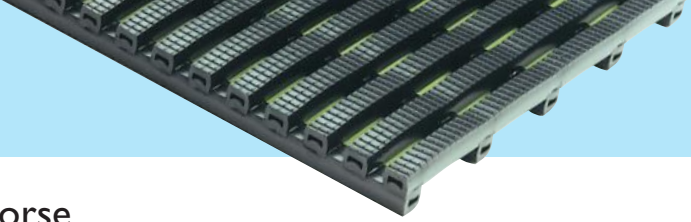

A hardwearing and versatile work horse

Heronair is an economical, tubular constructed matting for general purpose applications that provides excellent slip resistance and insulation.

Heronair's hollow construction uses less material, so it is also light to move and easy to lift for cleaning purposes.

It is especially effective wherever there is a risk of water and spillages underfoot as it is also highly slip resistant (R11 under DIN 51130 testing).



BENEFITS

Certified slip resistance DIN 51130: R11 - ASTM 1677: 0.6/0.6

Excellent drainage DIN 51130: V10

Fatigue-reducing and insulating

Chemical, oil and acid resistant

Easy to cut on site, contours to uneven surfaces

Quick to install

Fire resistant

Environmentally-friendly

FEATURES

Etched pattern

Two layer construction

Hollow construction

Non-porous PVC

Made from flexible PVC

Supplied in 33' (10m) rolls

Certified EN 13501: Cfl - S1

Made from 100% recycled material

STANDARD COLOR




BLACK

Other colors available on request.

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTIONS*		
Heronair	3/8" (10mm)	2' x 33' (0.6 x 10m)	3' x 33' (0.91 x 10m)	4' x 33' (1.22 x 10m)

*Contact us for custom dimensions.

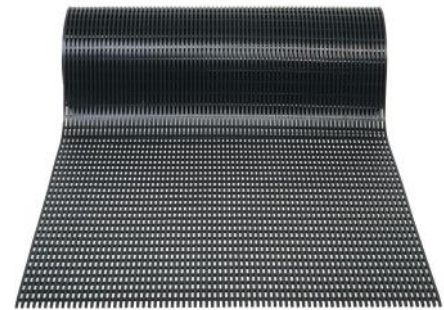



Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com

PRODUCT DATA SHEET: HERONAIR

SIZES & WEIGHTS

All dimensions are nominal	Height (in)	Length (ft)	Widths (ft)			Weight (lbs/sq.ft)
Tolerances	+/- 0.05"	0+1.0'	+/- 1/2"			
Heronair	3/8"	33'	2'	3'	4'	0.90



GENERAL

- APPEARANCES** Open grid “duckboard” design with textured surface.
- COLORS** Available in one homogenous standard color; Black.
- DURABILITY** One piece welded construction for maintenance free life.
- WORKABILITY** Available in rolls for ease of installation. Easy to cut to size and shape. Supplied in rolls with top ribs facing outwards. Requires inverting once rolled out prior to use.
- USES** All medium indoor & outdoor locations.

TECHNICAL DATA

- ACOUSTIC** Excellent sound absorption properties.
- CHEMICAL** Resistant to most acids, alkalines and oils. For specific chemical resistances, see www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf
- COMPOSITION** Flexible Polyvinyl Chloride (PVC)
- ENVIRONMENT** It has been determined under the guidelines for the State of California Safe Drinking Water and Toxic Enforcement Act of 1986 (Prop 65), that no warning labels or information provision are required for Heronair.
- Manufactured with our post-industrial recycled material. The recycled content averages at least 30%, but we strive for 100% where possible.
- Plastex does not use any substances currently included in the SVHC (*Substances of Very High Concern*) list under R.E.A.C.H.* in any matting products. Heronair is 100% recyclable.
- * Registration, Evaluation, Authorisation and Restriction of Chemical substances
- REVERSION** Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf
- SLIP RESISTANCE** ASTM F 1677 - Dry/Wet: 0.6/0.54
DIN 51130: R11, V10
- THERMAL** Functional -9⁰F + 140⁰F (slight size variation may occur at temperature extremes).
- UV LIGHT** Resistant to PVC degradation.
- WARRANTY** 2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf



Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com

PRODUCT DATA SHEET: HERONAIR

ANCILLARIES



3/8" x 2" x 33'
(10mm x 50mm x 10.1m)

2" PVC edging strip

Supplied in rolls of 33' (10.1m) length
with cold welding paste.

Colors: Black, Dark Gray




13/32" x 5'11"
(10.5mm x 1.8m)

Snap Track Low Profile

2 part snap track can be welded to join
rolls end to end or side to side for large area
covering. Supplied with welding paste.

Color: Dark Gray



Connector clips - Dual purpose

For joining sections of matting together side
to side or end to end. Supplied in packs of 10.



Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com