

PLASTEX CHEX

100% recycled heavy duty checker plate PVC tiles

Plastex Chex is a hard wearing tiling system, delivering long life and value for money.

It can be used as a temporary or permanent flooring solution for coverage of large areas in the workplace, such as work stations, finishing/assembly areas, laboratories, localised workcells and storage areas.




BENEFITS

- Slip resistant and hard wearing
- Insulating and chemical, oil and acid resistant
- Quick to install
- Environmentally-friendly
- REACH compliant
- Finished areas

FEATURES

- Checker plate surface
- Non-porous PVC (impermeable to fluids)
- Interlocking jigsaw tiles
- Made from 100% recycled material
- Made with certified recycled material
- PVC ramped edging

STANDARD COLOUR




BLACK

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD TILE SIZE
Plastex Chex	14mm (9/16")	0.5 x 0.5m (1'8" x 1'8")

Available in packs of 16 tiles

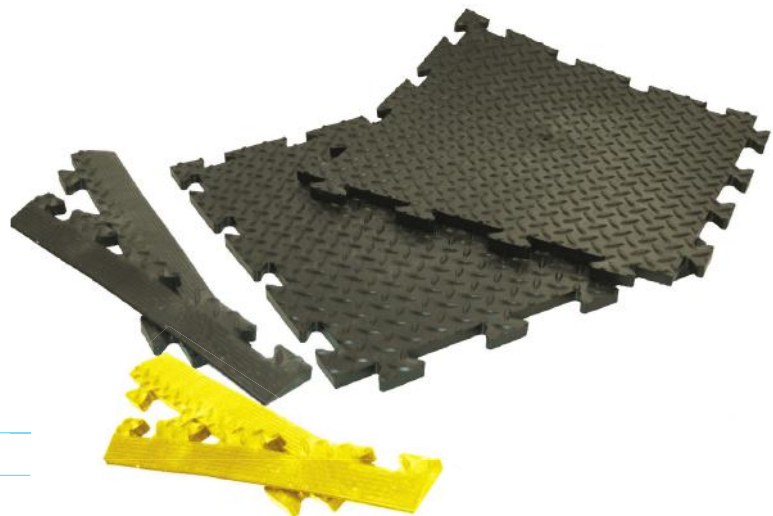

Plastic Extruders Ltd, Russell Gardens, Wickford, SS11 8DN, UK
Tel: +44(0)1268 571116



Web: www.plastexmatting.com

PRODUCT DATA SHEET: PLASTEX CHEX

Aug-18

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (mm)	Dimensions (cm)	Weight (kg/m ²)
<i>Tolerances (mm)</i>	<i>+/- 0.5</i>	<i>+/- 1</i>	
Plastex Chex	14	50 x 50	6.8



GENERAL

APPEARANCES	Solid grid with checker plate design.
COLOURS	Available in homogenous standard colour; Black.
DURABILITY	One piece welded construction for maintenance free life.
WORKABILITY	Heavy duty tiles with interlocking jigsaw mechanism.
USES	Heavy duty for work stations, finishing/assembly areas, laboratories, localised workcells and machine shops.

TECHNICAL DATA

ACOUSTIC	Excellent sound absorption properties.
CHEMICAL	Resistant to most acids, alkalines and oils. For specific chemical resistances, see www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf
COMPOSITION	Recycled PVC. Plasticised to a shore hardness of 55 Shore A.
ENVIRONMENT	Made from 100% post-industrial recycled PVC.
FIRE	UL 94 V-2
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf
THERMAL	Functional -23°C +60°C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistance to PVC degradation.
WARRANTY	2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf

ANCILLARIES



50mm PVC edging strip
Male and female strips available.
Supplied in 50cm lengths (1'8").

12mm x 50mm x 500mm
(1/2" x 2" x 1'8")

Colours: Black, Yellow