

PLASTEX CHEX

100% recycled heavy duty checker plate PVC tiles

Plastex Chex is a hard wearing tiling system, delivering long life and value for investment.

It can be used as a temporary or permanent flooring solution for coverage of large areas in the workplace, such as work stations, finishing/assembly areas, laboratories, localized workcells and storage areas.




BENEFITS

- Slip resistant and hard wearing
- Insulating and chemical, oil and acid resistant
- Quick to install
- Environmentally-friendly
- REACH compliant
- Finished areas


FEATURES

- Checker plate surface
- Non-porous PVC (impermeable to fluids)
- Interlocking jigsaw tiles
- Made from 100% recycled material
- Made with certified recycled material
- PVC ramped edging

STANDARD COLOR



BLACK

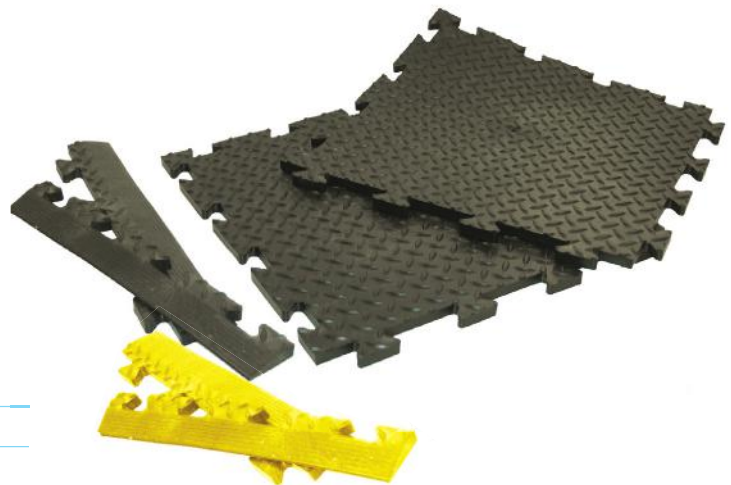

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD TILE SIZE
Plastex Chex	9/16" (14mm)	1'8" x 1'8" (0.5 x 0.5m)

Available in packs of 16 tiles





Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com

PRODUCT DATA SHEET: Plastex Chex

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (in)	Standard tile size (in)	Weight (lbs./sq.ft.)
<i>Tolerances</i>	<i>+/- 0.05"</i>	<i>+/- 1/2"</i>	
Plastex Chex	9/16"	1'8" x 1'8"	1.40



GENERAL

- APPEARANCES** Solid grid with checker plate design.
- COLORS** Available in homogenous standard color; Black.
- DURABILITY** One piece welded construction for maintenance free life.
- WORKABILITY** Heavy duty tiles with interlocking jigsaw mechanism.
- USES** Heavy duty for work stations, finishing/assembly areas, laboratories, localized work cells and machine shops.

TECHNICAL DATA

- ACOUSTIC** Excellent sound absorption properties.
- CHEMICAL** Resistant to most acids, alkalis and oils. For specific chemical resistances, see www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf
- COMPOSITION** Recycled PVC. Plasticized to a shore hardness of 55 Shore A.
- ENVIRONMENT** Made from 100% post-industrial recycled PVC.
- FIRE** UL 94 V-2
- REVERSION** Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf
- THERMAL** Functional -9°F +140°F (slight size variation may occur at temperature extremes).
- UV LIGHT** Resistance to PVC degradation.
- WARRANTY** 2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf

ANCILLARIES



2" PVC edging strip
 Male and female strips available.
 Supplied in 1'8" lengths (50cm).

1/2" x 2" x 1'8"
 (12mm x 50mm x 500mm) **Colors:** Black, Yellow



Plastex Matting Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
 Sales Tel: 256.845.7725

Web: www.plastexmatting.com