


PLASTEX GRID

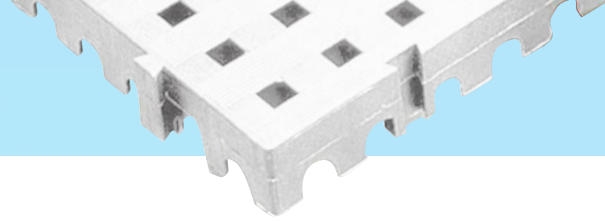

Heavy duty rigid grid tiling

A versatile flooring solution in multiple industrial applications.

Rigid polyethylene grid tiles with a secure, quick and easy 'lock-fit' connection, Plastex Grid provides a raised floor surface standing 1" (25mm) above ground.



BENEFITS


- Open grid or solid grid design
- Good slip resistance
- Resistant to detergents, industrial chemicals and acids
- 1" (25mm) high surface
- Effective coverage of large areas

FEATURES


- Open grid for removal of large volumes of liquid
- Textured surface
- Made from rigid polyethylene
- Withstands weights of up to 10,240lbs/ft²
- Secure 'lock fit' connection

STANDARD COLORS


PLASTEX GRID OPEN




RED



DARK GRAY



BLUE



GREEN




WHITE

PLASTEX GRID CLOSED



RED

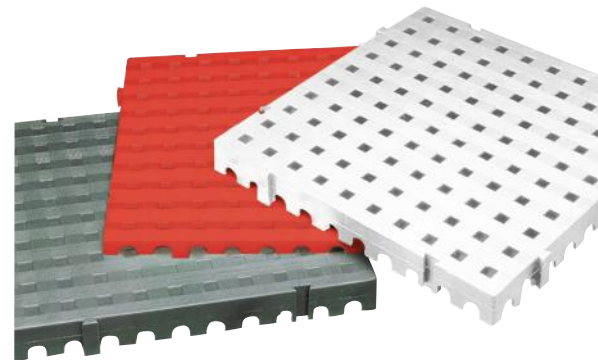

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD TILE SIZE	WEIGHT
Plastex Grid Open	1" (25mm)	1' 8" x 1' 8" (50 x 50cm)	0.66 lbs/sft (3.6 kg/m ²)
Plastex Grid Closed	1" (25mm)	1' 8" x 1' 8" (50 x 50cm)	0.80 lbs/sft (4.4 kg/m ²)





Plastex Mattinc Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com

PRODUCT DATA SHEET: Plastex Grid

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (in)	Standard tile size (in)	Weight (lbs./sq.ft.)
<i>Tolerances</i>	<i>+/- 0.05"</i>	<i>+/- 1/2"</i>	
Plastex Grid	1"	1'8" x 1'8"	0.70



GENERAL

APPEARANCES	Open grid surface.
COLORS	Red, Dark Grey, Blue, Green, White.
DURABILITY	LLDPE construction.
WEIGHT RESISTANCE	Withstands 50 T/m ² .
WORKABILITY	Rigid grid tiles with secure lock fit connection. Not self-supporting: to be used on flat floors only.
USES	Heavy duty industrial applications.

TECHNICAL DATA

CHEMICAL	Resistant to most acids, alkalines and oils.
COMPOSITION	Linear low density polyethylene (LLDPE).
HYGIENE	Non-porous 100% LLDPE - Inhibits the growth of bacteria.
THERMAL	Functional -76 ^o F +158 ^o F (slight size variation may occur at temperature extremes).
WARRANTY	2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf

ANCILLARIES



25mm x 66mm x 2m
(1" x 2 3/4" x 6'6")

66mm PVC Aluminum edging strip

Supplied in sections of 2m (6'6") length with fixing screws and plugs

Color: Anodized Aluminum

ANCILLARIES

2" PVC edging strip

Male and female strips available.
Supplied in 1'8" lengths (50cm).

1/2" x 2" x 1'8"
(12mm x 50mm x 500mm) **Colors:** Black, Yellow



Plastex Matting Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com