


# PLASTEX GRID

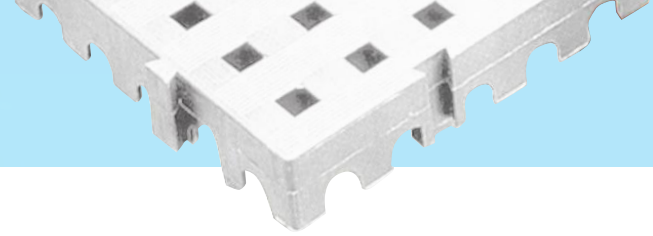

## Heavy duty rigid grid tiling

A versatile flooring solution in multiple industrial applications.

Rigid polyethylene grid tiles with a secure, quick and easy 'lock-fit' connection, Plastex Grid provides a raised floor surface standing 25mm (1") above ground.



### BENEFITS

- Open grid design
- Good slip resistance
- Resistant to detergents, industrial chemicals and acids
- 25mm (1") high surface
- Effective coverage of large areas


### FEATURES

- Open grid for removal of large volumes of liquid
- Textured surface
- Made from rigid polyethylene
- Withstands weights of up to 50 T/m<sup>2</sup>
- Secure 'lock fit' connection


### STANDARD COLOURS




RED



DARK GREY



BLUE




GREEN



WHITE

### STANDARD SIZES

PRODUCT	HEIGHT	STANDARD TILE SIZE	WEIGHT
Plastex Grid	25mm (1")	50 x 50cm (1' 8" x 1' 8")	3.6 kg/m <sup>2</sup> (0.66 lbs/sft)

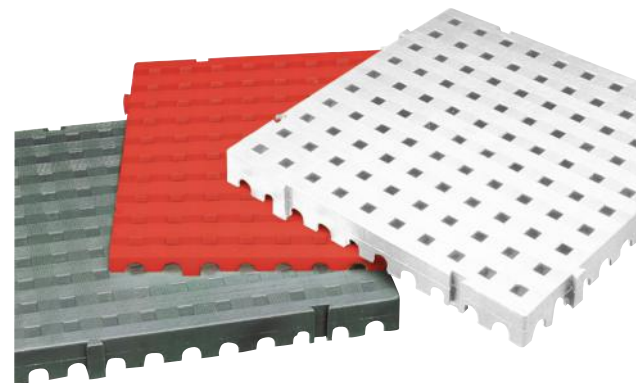

# PRODUCT DATA SHEET: PLASTEX GRID

May-18

## SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (mm)	Dimensions (cm)	Weight (kg/m <sup>2</sup> )
<i>Tolerances (mm)</i>	<i>+/- 0.5</i>	<i>+/- 1</i>	
Plastex Grid	25	50 x 50	3.6



Plastex Grid Open

## GENERAL

APPEARANCES	Open grid surface.
COLOURS	Red, Dark Grey, Blue, Green, White.
DURABILITY	LLDPE construction.
WEIGHT RESISTANCE	Withstands 50 T/m <sup>2</sup> .
WORKABILITY	Rigid grid tiles with secure lock fit connection. Not self-supporting: to be used on flat floors only.
USES	Heavy duty industrial applications.

## TECHNICAL DATA

CHEMICAL	Resistant to most acids, alkalines and oils.
COMPOSITION	Linear low density polyethylene (LLDPE).
HYGIENE	Non-porous 100% LLDPE - Inhibits the growth of bacteria.
THERMAL	Functional from -60°C to + 70°C (slight size variation may occur at temperature extremes).
WARRANTY	2 years. See <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf</a>

## ANCILLARIES



25mm x 66mm x 2m  
(1" x 2 3/4" x 6'6")

**66mm PVC Aluminium edging strip**  
Supplied in sections of 2m (6'6") length with  
fixing screws and plugs

**Colour:** Anodised Aluminium

Plastic Extruders Ltd, Russell Gardens, Wickford, SS11 8DN, UK  
Tel: +44(0)1268 571116

Web: [www.plastexmatting.com](http://www.plastexmatting.com)

