


SPARKSAFE

Textured heat repellent rubber top surface on a foam base

Repels sparks and hot metal fragments in industrial workplaces, welding stations, assembly areas, machine shops and wherever heat generating equipment is in use.

For the toughest conditions, when the heat is on, Sparksafe is a two part, all rubber constructed anti-fatigue matting with special heat repellent properties to withstand sparks and hot metal fragments.

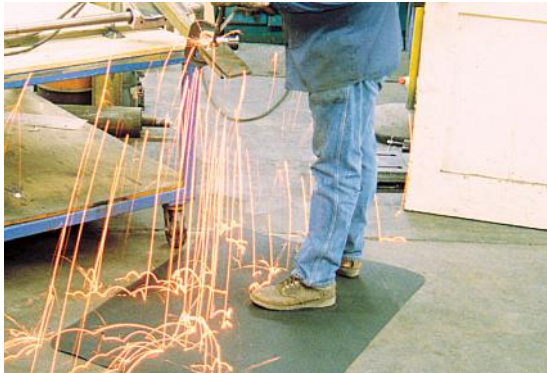


BENEFITS

- High wear resistance and resilience
- Repels sparks and hot metal shards
- Excellent anti-fatigue relief
- Quick to install


FEATURES

- Rubber top with rubber foam backing
- Heat resistant rubber wear layer
- Soft foam base
- Supplied in standard modules

STANDARD COLOR



BLACK

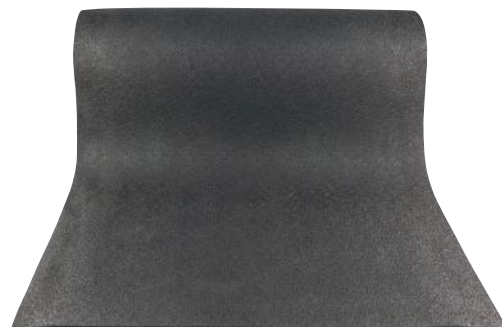

STANDARD SIZES


PRODUCT	HEIGHT	STANDARD MODULE OPTIONS*	
Sparksafe	9/16" (14mm)	2' x 3' (0.6 x 0.91m)	3' x 5' (0.91 x 1.5m)

*Supplied with integral edging to 4 sides.

PRODUCT DATA SHEET: SPARKSAFE

SIZES & WEIGHTS

	<i>All dimensions are nominal</i>	Height (in)	Module options (ft)	Weight (lbs/sq.ft)
	<i>Tolerances</i>	<i>+/- 0.05"</i>		
Sparksafe	3/8"		2' x 3' 3' x 5'	1.20



GENERAL

- APPEARANCES** Single layer foam glued together to top wear layer. Supplied with integral edging to 4 sides.
- COLOUR** Black.
- DURABILITY** 100% rubber foam.
- WORKABILITY** Available in rolls for ease of installation. Easy to cut to size and shape.
- USES** Industrial work andwelding stations, repels sparks and hot metal shards.

TECHNICAL DATA

- ACOUSTIC** Excellent sound absorption properties.
- ANTI-FATIGUE** Resilience ASTM 2362 **Sparksafe = 35**
- COMPOSITION** Rubber foam/rubber wear layer.
- THERMAL** Functional -9°F + 140°F (slight size variation may occur at temperature extremes).
- WARRANTY** 2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf

