


## Wide space open grid slip resistant matting

For greasy and grimy environments.

This highly slip resistant matting is very effective wherever oils or greasy materials are spilled. A wide grid design allows for better drainage and fall through, keeping the surface free from potentially dangerous slip hazards. Trackgrip was developed for railway maintenance areas but is highly effective in most greasy and grimy environments.

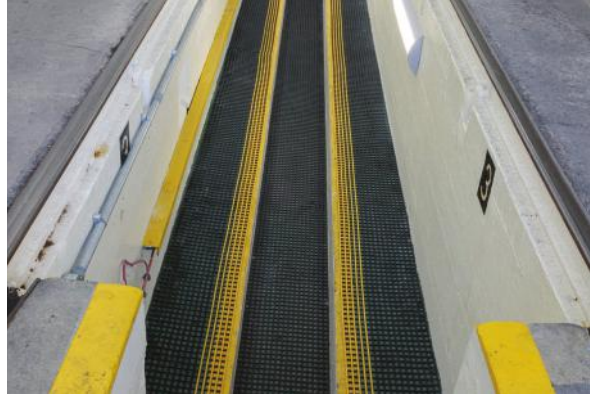

### BENEFITS

- Certified slip resistance DIN 51130: R11 ASTM 1677: 0.9/0.7
- Excellent drainage
- Chemical, oil and acid resistant
- Easy to clean with a high pressure hose
- Quick to install
- Fire resistant


### FEATURES

- Diamond cut pattern
- Two layer construction and extra wide spacing
- Non-porous PVC (impermeable to fluids)
- Made from flexible PVC
- Supplied in 10m rolls
- Certified EN 13501: Cf1 - S1


### Trackgrip Plus

Trackgrip with the additional benefit of yellow bands to mark routes and delineate areas.


### STANDARD COLOUR



BLACK



BLACK with YELLOW EDGING

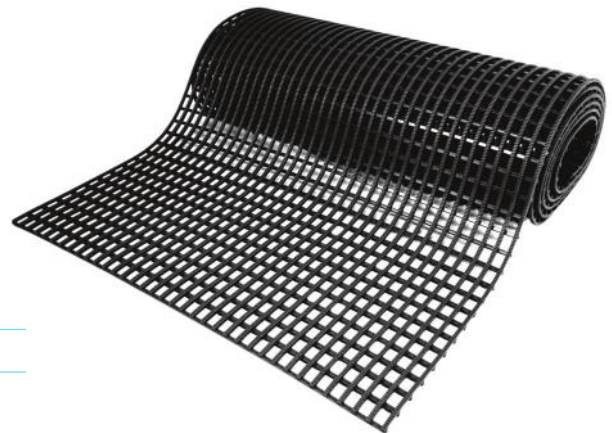

### STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTIONS*		
Trackgrip	15mm (5/8")	10 x 0.6m (33' x 2')	10 x 0.91m (33' x 3')	10 x 1.22m (33' x 4')
Trackgrip Plus	15mm (5/8")	10 x 0.6m (33' x 2')	10 x 0.91m (33' x 3')	10 x 1.22m (33' x 4')



\*Contact us for bespoke dimensions.

# PRODUCT DATA SHEET: TRACKGRIP


Mar-18

## SIZES & WEIGHTS

	All dimensions are nominal		Height (mm)	Lengths (m)	Widths (cm)		Weight (kg/m <sup>2</sup> )
	Tolerances (mm)		+/- 0.5	0+0.3	+/- 1		
Trackgrip	15	10	60	91	122	4.6	
Trackgrip Plus	15	10	91	122	4.6		



Trackgrip



Trackgrip Plus

## GENERAL

APPEARANCES	Open grid “duckboard” design with textured surface.
COLOURS	<b>Trackgrip:</b> Available in homogenous standard colour; Black. Other colours available on request. <b>Trackgrip Plus:</b> Black with Yellow edging on one side.
DURABILITY	One piece welded construction for maintenance free life.
WORKABILITY	Available in rolls for ease of installation. Easy to cut to size and shape. Supplied in rolls with top ribs facing outwards. Requires inverting once rolled out prior to use.
USES	Heavy duty applications, both indoor and outside.

## TECHNICAL DATA

ACOUSTIC	Excellent sound absorption properties.
CHEMICAL	Resistant to most acids, alkalines and oils. For specific chemical resistances, see <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf</a>
COMPOSITION	Flexible Polyvinyl Chloride (PVC).
ENVIRONMENT	Plastex does not use any substances current Insulation resistance <i>Concern</i> ) list under R.E.A.C.H.* in any matting products. All products are 100% recyclable. * Registration, Evaluation, Authorisation and Restriction of Chemical substances
HYGIENE	Non-porous 100% Virgin PVC - Inhibits the growth of bacteria.
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf</a>
SLIP RESISTANCE	ASTM F 1677 - Dry/Wet: 0.9/0.7 DIN 51130: R11, V10
THERMAL	Functional -23°C +60°C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistance to PVC degradation.
WARRANTY	3 years. See <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf</a>



Plastic Extruders Ltd, Russell Gardens, Wickford, SS11 8DN, UK  
Tel: +44(0)1268 571116

Web: [www.plastexmatting.com](http://www.plastexmatting.com)

# PRODUCT DATA SHEET: TRACKGRIP

## ANCILLARIES



14mm x 60mm x 10.1m  
(9/16" x 2 1/2" x 33')

### 60mm PVC edging strip

Supplied in rolls of 10.1m (33') length with cold welding paste.

**Colours:** Black, Dark Grey, Dark Brown, Holly Green, Oxford Blue, Yellow



14mm x 100mm x 10.1m  
(9/16" x 3 3/4" x 33')

### 100mm PVC edging strip

Supplied in rolls of 10.1m (33') length with cold welding paste.

**Colours:** Black, Dark Grey, Yellow



15mm x 45mm x 2m  
(5/8" x 1 13/16" x 6'6")

### 45mm Aluminium edging strip

Supplied in sections of 2m (6'6") length with fixing screws and plugs.

**Colours:** Anodised Aluminium, Powder Coated Yellow



### Small floor hook

For securing sections of matting to floor. Supplied in packs of 10 with screws and plugs.



### Connector clips - Dual purpose

For joining sections of matting together side to side or end to end. Supplied in packs of 10.