

TUFF SPUN

An economical anti-fatigue foam matting

REACH compliant closed cell matting in PVC foam composition for light duty use.

A good value, hard working, anti-fatigue matting with a ribbed slip resistant surface, Tuff Spun also reduces impact noise and protects items accidentally dropped.



BENEFITS

Certified wear resistance **ASTM 4060**: <1 gram loss

Good slip resistance

Reduces standing fatigue and underfoot noise and protects items accidentally dropped from damage

Quick to install

FEATURES

Minimal wear standing foam which will not deaden

Ribbed surface

Closed cell PVC foam construction

Supplied in 60' (18m) rolls or standard modules

STANDARD COLORS



BLACK



DARK GRAY



BLACK WITH
YELLOW EDGING



STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTIONS*			STANDARD MODULE OPTIONS*		
Tuff Spun Gray	3/8" (9mm)		3' x 60' (0.91 x 18m)		2' x 3' (0.6 x 0.91m)	3' x 5' (0.91 x 1.5m)	3' x 10' (0.91 x 3m)
Tuff Spun Black	3/8" (9mm)	2' x 60' (0.6 x 18m)	3' x 60' (0.91 x 18m)	4' x 60' (1.22 x 18m)			
Tuff Spun Plus	3/8" (9mm)		3' x 60' (0.91 x 18m)		2' x 3' (0.6 x 0.91m)	3' x 5' (0.91 x 1.5m)	3' x 10' (0.91 x 3m)


*Supplied with integral edging to 4 sides.

PRODUCT DATA SHEET: TUFF SPUN

Jun-18

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (in)	Length (ft)	Widths (ft)			Module options (ft)	Weight (lbs/sq.ft)
<i>Tolerances</i>	<i>+/- 0.05"</i>	<i>0+1.0'</i>	<i>+/- 1/2"</i>				
Tuff Spun Grey	3/8"	33'	3'			2' x 3' 3' x 5' 3' x 10'	0.68
Tuff Spun Black	3/8"	33'	2'	3'	4'		0.68
Tuff Plus	3/8"	33'	3'			2' x 3' 3' x 5' 3' x 10'	0.68

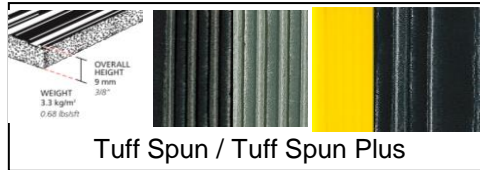

GENERAL


APPEARANCES	Single layer foam. Supplied with integral edging to 4 sides.		
COLORS	Tuff Spun: Black, Dark Gray	Tuff Spun Plus: Black with Yellow edging	
DURABILITY	Extruded vinyl foam.		
WORKABILITY	Available in rolls for ease of installation. Easy to cut to size and shape.		
USES	The best budget anti-fatigue matting available with yellow edging for safety.		

TECHNICAL DATA

ACOUSTIC	Excellent sound absorption properties.		
COMPOSITION	Vinyl foam.		
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf		
THERMAL	Functional -9°F +140°F (slight size variation may occur at temperature extremes).		
UV LIGHT	Resistant to PVC degradation.		
WARRANTY	1 year. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf		


WEAR RATINGS	ASTM D4060 @ 1,000 cycles	Tuff Spun <1g	Tuff Spun Plus <1g
--------------	---------------------------	-------------------------	------------------------------

ANCILLARIES



2" PVC edging strip
Supplied in rolls of 10.1m (33') length with cold welding paste.
Colors: Black, Dark Gray
Holly Green, Oxford Blue, Yellow

3/8" x 2" x 33'
(10mm x 50mm x 10.1m)



Snap Track Low Profile
2 part snap track can be welded to join rolls end to end or side to side for large area covering. Supplied with cold welding paste.
Colors: Black, Dark Gray

1 3/32" x 8'2"
(10.5mm x 2.5m)



Plastex Matting Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com