

Heavy duty ribbed surface on a high density foam

Outstanding slip resistance and wear with thermally laminated Zed Land foam that provides excellent anti-fatigue properties.

An exceptional combination of extremely durable Flexi Tred vinyl fused to patented Zed Land anti-fatigue blue foam. This product is manufactured with a very hard wearing slip resistant ribbed surface. Anti-fatigue matting at its most resilient.



BENEFITS

- High wear resistance and resilience
- Extra slip resistance
- Excellent standing fatigue reducing properties will boost productivity
- Easy to cut to shape and quick to install

FEATURES

- Minimal wear standing foam which will not deaden
- Ribbed vinyl surface
- Patented vinyl foam construction with superior resilience
- Supplied in 33' (10m) rolls or standard modules


STANDARD COLORS



BLUE



LIGHT GRAY

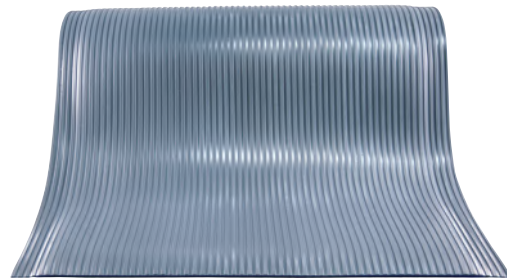

STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTION*	STANDARD MODULE OPTIONS*		
Zed Tred	1/2" (13mm)	3'3" x 33' (1 x 10m)	3'3" x 5' (1 x 1.5m)	3'3" x 10'10" (1 x 3.3m)	3'3" x 16'6" (1 x 5m)


*Supplied with integral edging to 4 sides.

PRODUCT DATA SHEET: ZED TRED

Jun-18

SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (in)	Length (ft)	Width (ft)	Module options (ft)	Weight (lbs/sq.ft)
<i>Tolerances</i>	<i>+/- 0.05"</i>	<i>0+1.0'</i>	<i>+/- 1/2"</i>		
Zed Tred	1/2"	33'	3'3"	3'3" x 5' 3'3" x 10'10" 3'3" x 16'5"	1.60



GENERAL

APPEARANCES	Heavy duty ribbed surface on a thermally laminated patented Zed Land high density foam. Supplied with integral edging to 4 sides.
COLORS	Blue or Light Gray on a Blue Zed Land base.
DURABILITY	Foam thermally fused to top vinyl surface.
WORKABILITY	Available in rolls for ease of installation. Easy to cut to size and shape.
USES	Heavy duty foam matting for industrial applications.

TECHNICAL DATA

ACOUSTIC	Excellent sound absorption properties.
ANTI-FATIGUE	Resilience ASTM 2362 Zed Tred = 23
COMPOSITION	Vinyl foam/vinyl wear layer.
THERMAL	Functional -9°F +140°F (slight size variation may occur at temperature extremes).
WARRANTY	2 years. See www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf



Plastex Matting Inc., 120 55th Street NE Fort Payne, AL 35967 U.S.A.
Sales Tel: 256.845.7725

Web: www.plastexmatting.com