

# Flexipath Covid-19




Lightweight, slip-resistant delineated walkway and safety stand zone matting for visitors, customers and employees.



Implement social distancing measures quickly and easily with Flexipath Covid-19, a single-tier, lightweight walkway mat with delineated stand zones in alternating colour blocks.

As Covid-19 lockdown restrictions begin to ease, many businesses face the challenge of continuing or restarting operations while complying with social distancing measures. Our Flexipath Covid-19 matting has delineated stand zones that allow customers, visitors and employees to easily observe social distancing rules.

The mat's alternating colour blocks makes it ideal for businesses with queuing customers or workplaces with standing employees. The lightweight construction means the mat is quick to install and easy to move if needed.



## Features:



Etched surface



Open-grid construction



Resistant to most acids, alkali and oils



Single tier, lightweight construction



Comes in rolls of up to 24m (84')




## Benefits:



Certified slip resistant (DIN 51130:R11, DIN 51097:C)



Excellent drainage (DIN 51130:V10)



Easy to clean



Contours to uneven surfaces and comfortable to stand on



Quick to install and move if needed



## Plastic Extruders Ltd.

Russell Gardens, Wickford  
Essex, SS11 8DN  
+44 (0) 1268 571 116

UK + USA manufactured  
matting products:  
[plastexmatting.com](http://plastexmatting.com)



# Flexipath Covid-19


## Data sheet




### Standard sizes:

Product	Flexipath Covid-19
Height	6mm (1/4")
Standard roll options	24 x 0.45m (84' x 18")
	24 x 0.6m (84' x 2')
	24 x 0.91m (84" x 3')
Weight	3.70kg/m2 (0.76lb/sq.ft)


### Standard colours:



Blue / black



More colours  
available  
upon request

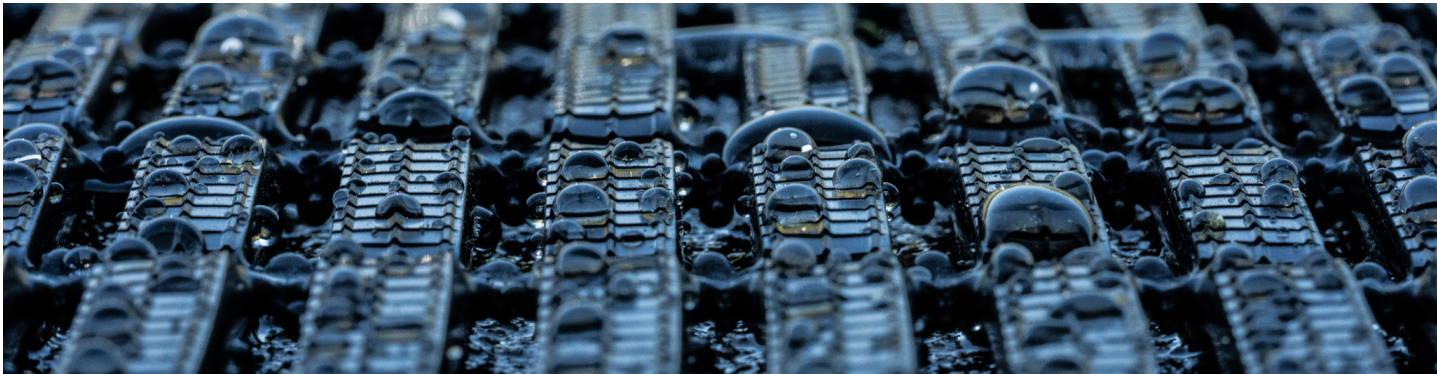

# Flexipath Covid-19

## Data sheet



### Installation:

Flexipath's one-piece construction means installation is simple:

- Comes in rolls of up to 24m
- Place where needed and unroll
- No special tools or previous site visits needed
- Contours to uneven surfaces

### Cleaning:

Flexipath's lightweight, open-grid construction makes it easy to clean:

- Simply lift or roll to clean
- Easy to clean with a high pressure hose

### Technical information:

<b>Acoustic</b>	Excellent sound absorption
<b>Chemical</b>	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this <a href="#">information sheet</a> .
<b>Composition</b>	Flexible Polyvinyl Chloride (PVC)
<b>Environment</b>	Flexipath Covid-19 is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
<b>Fire</b>	EN13501-1 : 2007 and classified - Cfl - S1
<b>Hygiene</b>	Made from non-porous PVC that's naturally resistant to bacteria growth.
<b>Reversion</b>	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by <a href="#">downloading this information sheet</a> .
<b>Slip resistance</b>	ASTM F 1677 - Dry/Wet: 1.0/0.8 DIN51130: R11, V10 DIN51097: Classification C
<b>Thermal</b>	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
<b>UV light</b>	Resistant to PVC degradation. The red colour isn't colourfast in direct sunlight.
<b>Warranty</b>	One year. Visit our <a href="#">policies page</a> for more information about warranties