

# Flexi / Eco Dot



Multi-purpose matting in a stylish dot pattern designed to protect floors and surfaces.



The perfect combination of style and practicality, Flexi Dot is ideal for covering large areas.

Designed for both commercial and light industrial workplaces, Flexi Dot comes in 98cm widths and 20m lengths for easy installation. The small dot design makes it easy to clean and suitable for small-wheeled traffic like trolleys and wheelchairs. For areas with particularly high footfall, we recommend Flexi Dot Extra, which has a raised button pattern for busy workplaces.



## Features:



Small dot design



Hard-wearing vinyl sheets




Made from flexible PVC



Supplied in a convenient roll format



Eco version manufactured from 100% post industrial recycled material

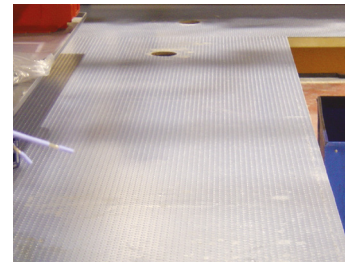

## Benefits:



Good slip resistance



Resistant to chemicals, acids and oils



Easy to cut to fit on site; contours to uneven surfaces



Quick to install



Environmentally friendly

## Plastic Extruders Ltd.

Russell Gardens, Wickford  
Essex, SS11 8DN  
+44 (0) 1268 571 116

UK + USA manufactured matting products:  
[plastexmatting.com](http://plastexmatting.com)



### Standard sizes:

Product	Flexi / Eco Dot	Flexi / Eco Dot Extra
Height	1.6mm (1/16")	2.5mm (3/32")
Standard roll options	25 x 0.98m (82' x 3'2")	20 x 0.98m (65'7" x 3'2")
Weight	2.35 kg/m <sup>2</sup> (0.48 lb/sq.ft)	3.75 kg/m <sup>2</sup> (0.77 lb/sq.ft)

### Tolerances:

	Height (+/- 0.5mm)	Lengths (0+0.3 m)	Widths (+/- 1cm)
Flexi / Eco Dot	1.6 mm	25 m	98 cm
Flexi / Eco Dot Extra	2.5 mm	20 m	98 cm

All dimensions are nominal

### Technical information:

<b>Chemical</b>	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this <a href="#">information sheet</a> .
<b>Composition</b>	Flexible Polyvinyl Chloride (PVC)
<b>Environment</b>	Flexi/Eco Dot is 100% recyclable and contains no substances included in the SVHC list under REACH.
<b>Fire</b>	EN 13501-1: 2007-Bfl-S1
<b>Reversion</b>	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this <a href="#">information sheet</a> .
<b>Thermal</b>	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
<b>UV light</b>	Resistant to PVC degradation
<b>Warranty</b>	One to two years. Visit our <a href="#">policies page</a> for more information about warranties

### Installation:

Flexi Dot's one-piece construction means installation is simple:

- Supplied in convenient roll formats
- Easy to cut to size
- Contours to the sub floor

### Cleaning:

Keeping Flexi Dot looking good is easy:

- Easy to clean with a vacuum or mop
- No special cleaning tools needed

### Colours:



Black



Dark grey



Blue



Black  
(Eco Dot and Eco  
Dot Extra only)

More colours  
available  
upon request