


Flexi Line




Fine ribbed matting with a slip-resistant surface designed for areas alongside or on top of benches.

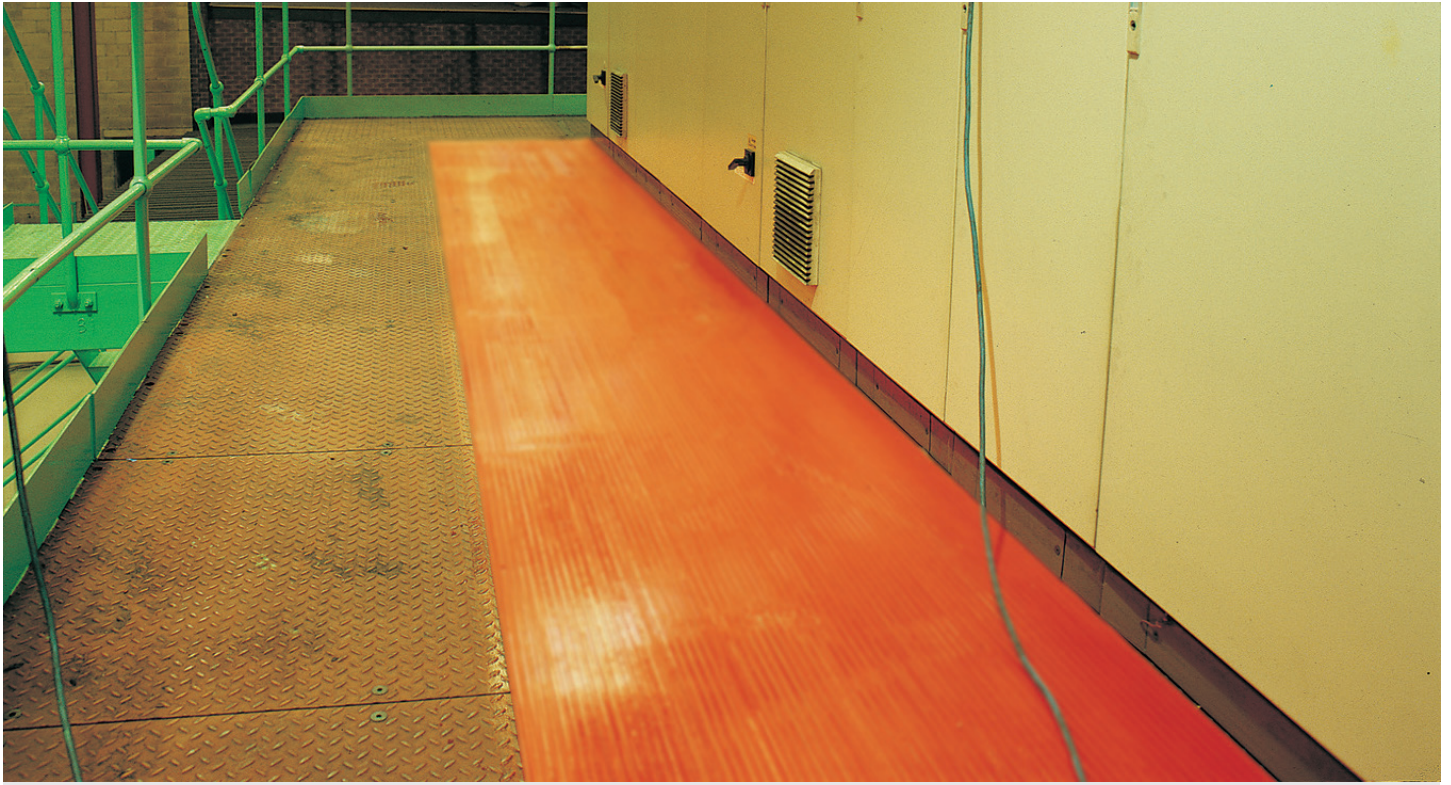

A lightweight alternative to conventional rubber runners, Flexi Line is designed to be used beside or on work areas.

The narrow ribs provide good slip resistance, while its dense composition reduces the impact of any noise that might be generated by industrial machinery. Hard-wearing and easy to wipe clean, it's also resistant to oils, acids and chemicals.



Features:



Fine ribbed surface



Vinyl composition



Made from flexible PVC



Supplied in a convenient roll format



Light to handle



Benefits:



Good slip and wear resistance



Resistant to chemicals, acids and oils



Easy to cut to fit on site; contours to uneven surfaces



Quick to install



Easy to clean

Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured matting products:
plastexmatting.com

Standard sizes:

| | |
|------------------------------|--------------------------------------|
| Product | Flexi Line |
| Height | 2mm (5/64") |
| Standard roll options | 25 x 1m (82' x 3'3") |
| Weight | 2.2kg/m ² (0.45lbs/sq.ft) |

Tolerances:

| | Height (+/- 0.5mm) | Length (0+0.3m) | Width (+/- 1cm) |
|-------------------|---------------------------|------------------------|------------------------|
| Flexi Line | 2 mm | 25 m | 100 cm |

All dimensions are nominal

Technical information:

| | |
|--------------------|--|
| Chemical | Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet . |
| Composition | Flexible Polyvinyl Chloride (PVC) |
| Environment | Flexi Line is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products. |
| Fire | EN 13501-1: 2007-Bfl-S1 |
| Reversion | Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet . |
| Thermal | Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes. |
| UV light | Resistant to PVC degradation. |
| Warranty | One year. Visit our policies page for more information about warranties |

Installation:

Flexi Line's one-piece construction means installation is simple:

- Supplied in convenient roll format
- Easy to cut to size
- Contours to the sub floor

Cleaning:

Keeping Flexi Line looking good is easy:

- Light to handle
- Simply lift or roll to clean
- Easy to clean with a vacuum or mop

Colours:



Black



Red



Light grey

More colours
available
upon request