Flexi Line




Fine ribbed matting with a slip-resistant surface designed for areas alongside or on top of benches.



A lightweight alternative to conventional rubber runners, Flexi Line is designed to be used beside or on work areas.

The narrow ribs provide good slip resistance, while its dense composition reduces the impact of any noise that might be generated by industrial machinery. Hard-wearing and easy to wipe clean, it's also resistant to oils, acids and chemicals.




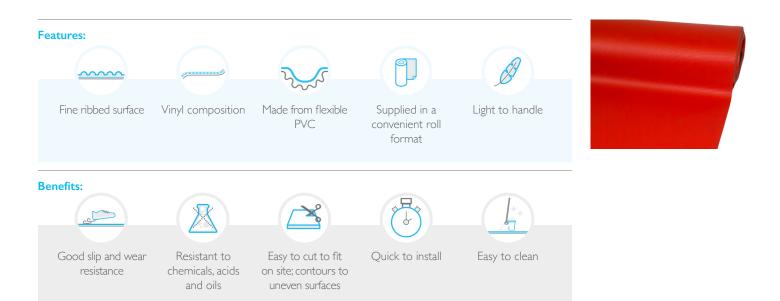

Plastic Extruders Ltd.

Russell Gardens, Wickford Essex, SSII 8DN +44 (0) 1268 571 116 UK + USA manufactured matting products: plastexmatting.com







Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
Flexi Line	2 mm	25 m	100 cm

All dimensions are nominal

Technical information:

Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet.		
Composition	Flexible Polyvinyl Chloride (PVC)		
Environment	Flexi Line is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.		
Fire	EN 13501-1:2007-Bfl-S1		
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by <u>downloading this information sheet</u> .		
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.		
UV light	Resistant to PVC degradation.		
Warranty	One year. Visit our <u>policies page</u> for more information about warranties		

Installation:

Flexi Line's one-piece construction means installation is simple:

- Supplied in convenient roll format
- Easy to cut to size
- Contours to the sub floor

Cleaning:

Keeping Flexi Line looking good is easy:

- Light to handle
- Simply lift or roll to clean
- Easy to clean with a vacuum or mop



More colours available upon request