

Frontrunner® XT




Extra slip-resistant entrance matting perfect for high traffic exterior and interior areas.



Frontrunner XT is a heavy-duty entrance mat designed to combat substantial amounts of dirt and large debris.

The deep-etched tread scrapes shoes and wheels clean, while the open grid traps and collects the debris, preventing it from traveling inside. This extra slip-resistant mat is ideal for walkways like hardwood decking and bridges that tend to get slippery in wet weather. You can use Frontrunner XT inside and outside, or combine with entrance matting specifically designed for high traffic inside areas, like Frontrunner Plus.

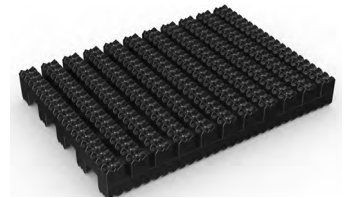

Features:



Diamond cut pattern



Two layer open-grid construction



Close mesh grid



Made from flexible PVC



Comes in 33' (10m) rolls



Benefits:



Certified slip resistant (DIN 51130:R12)



Excellent drainage (DIN 51130:V10)




Wheel-and-heel proof



Easy to cut on site, contours to uneven surfaces



Seamless installation

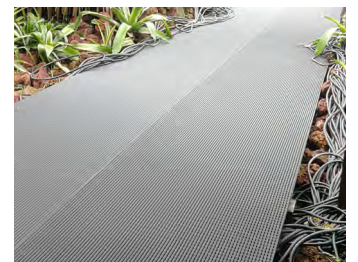

Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured matting products:
plastexmatting.com

Data sheet

Standard sizes:

Product	Fronrunner XT	Low Profile
Height	9/16" (14mm)	13/32" (10.5mm)
Standard roll options	33' x 2' (10 x 0.6m)	33' x 2' (10 x 0.6m)
	33' x 3' (10 x 0.91m)	33' x 3' (10 x 0.91m)
	33' x 4' (10 x 1.22m)	33' x 4' (10 x 1.22m)
Weight	2lb/sq.ft (10.5kg/m ²)	1.8lbs/sq.ft (8.7kg)

Tolerances:

	Height (+/- 0.05")	Length (0+1.0')	Width (+/- 1/2")
Fronrunner XT	9/16"	33'	2' 3' 4'
Fronrunner XT Low Profile	13/32"	33'	2' 3' 4'

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Fronrunner XT is 100% recyclable. Our Fronrunner Entrance matting System qualifies for LEED IEQ Credit 5, and when produced in black or gray, Fronrunner may also qualify for LEED MR Credit 4. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Slip resistance	DIN 51130: R12, V10 DIN 51130: R11, V10 (Fronrunner XT Low Profile)
Thermal	Designed to function at temperatures from -9°F and up to +140°F. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Volatile organic compound (VOC)	CDPH/EHLB Standard Method V1.2-2017 (California Section 01350) - School Classroom: PASS CDPH/EHLB Standard Method V1.2-2017 (California Section 01350) - Office: PASS Measured concentration of Total Volatile Organic Compounds (TVOC): Less than/equal to 0.5 mg/m ³ (in compliance with CDPH/EHLB Standard Method v1.2-2017)
Warranty	Fronrunner XT: four years Fronrunner XT Low Profile: two years Visit our policies page for more information about warranties

Product data sheet

Colors:



Black



Dark gray



Oxford blue

More colors
available
upon request

Installation:

Fronrunner XT's one-piece construction means installation is simple:

- No special tools or previous site visits
- Integrates with all internal floor coverings
- Fits with different well depths
- Contours to the floor

[Watch](#) or download the [recessed entrance matting installation instructions](#) and the [surface-mounted installation instructions](#)

Cleaning:

Keeping Fronrunner XT looking good is easy:


- Reduces cleaning intervals
- Simply roll or lift to clean
- No special tools needed
- Easy to vacuum or clean with a pressure hose

[Watch](#) or [download](#) the the cleaning instructions.

Ancillaries:


> For surface mounted installations

PVC edging (H: 9/16, W: 2 1/2")




Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray, dark brown, holly green, Oxford blue, yellow. Size: 9/16" x 2 1/2" x 33' (14mm x 60mm x 10.1m)

PVC Edging (H: 9/16, W: 3 3/4")




Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray and yellow. Size: 9/16" x 3 3/4" x 33' (14mm x 100mm x 10.1m)

PVC snap track (H: 9/16")




Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black, dark gray and yellow. Size: 9/16" x 3 3/4" x 33' (14mm x 100mm x 10.1m)

Aluminium edging (H: 9/16")



Supplied in sections of 6'6" (2m) length with fixing screws and plugs. Comes in anodized aluminum and powder coated yellow. Size: 9/16" x 1 13/16" x 6'6" (14mm x 45mm x 2m)

Connector clips: side-to-side (H: 9/16")



For joining sections of matting together side-to-side. Supplied in packs of 10

Product data sheet

Ancillaries:

> For recessed installations

R frame (H: 9/16")



You'll need these to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 9/16" x 15/32" (14mm x 12mm)

J frame (H: 1 1/16")




Installing Frontrunner against a wall? You'll need a J frame to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in dark gray and black. Size: 1 1/16" x 2 3/8" (18mm x 60mm)

T frame (H: 9/16")



You can use a T frame (1") to divide the matting into sections left-to-right – this makes it easier to lift and clean. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black

TL frame (H: 9/16")




You can use a T/L frame (2") to divide the matting into sections left-to-right – this makes it easier to lift and clean. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminium

H section (H: 9/16")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a H section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in black, with mat insert colour specified. Size: 9/16" x 15/32" (14mm x 12mm)

U section (H: 9/16")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a U section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 9/16" x 3/4" (14mm x 19mm)

L frame (H: 5/18")




Installing around a circular door or non rectangular space? You'll need a L frame to secure the matting. Size: 5/18" x 8' (15mm x 2.7m length)

Product data sheet

Ancillaries:

> For surface mounted installations: Low profile

PVC edging (H: 3/8", W: 2")



Supplied in rolls of 33' (10.1m) length. One tube of cold welding paste recommended for every 33' of edging. Comes in black and dark gray. Size: 3/8" x 2" x 33' (10mm x 50mm x 10.1m)

PVC snap track (H: 3/8")



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. Supplied with cold welding paste. Comes in dark gray and black. Size: 13/32" x 8'2" (10.5mm x 2.5m)

Connector clips: side-to-side (H: 3/8")



For joining sections of low profile matting together side-to-side. Supplied in packs of 10

> For recessed installations: Low profile

R frame (H: 3/8")



You'll need these to secure the matting on the left-to-right edges. Supplied in sections of 10' (3m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 15/32" (10mm x 12mm)

U section (H: 3/8")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a U section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 1 1/16" (10mm x 18mm)

H section (H: 3/8")



If the front-to-back dimension of the mat well is greater than the final width of your matting, you may need a H section to secure the different sections together. Supplied in sections of 10' (3m) length, with fixing screws and plugs. Comes in black, with mat insert colour specified. Size: 3/8" x 1/2" (10mm x 13mm)

Z frame (H: 3/8")



Installing matting next to ceramic tiles? You'll need a Z frame to secure the matting. Supplied in sections of 11' (3.6m) length with fixing screws and plugs. Comes in anodized aluminum, powder coated dark gray and black. Size: 3/8" x 15/16" (10mm x 24mm)