


Slip-resistant workplace matting that's light to handle and super versatile.



Certified slip resistant with excellent drainage and anti-fatigue benefits, Heronair is perfect for light industrial workplaces and walkways where there's a risk of water underfoot.

Made from non-porous PVC with an etched pattern, Heronair is impermeable to fluids and provides excellent drainage, making it ideal for environments where spillages are likely. The hollow construction makes it light to lift and easy to move, so installation is quick and cleaning is simple.

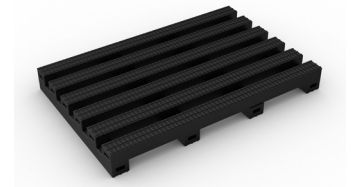

Features:



Etched surface



Two layer, tubular construction



Made from non-porous PVC



Fatigue reducing and insulating



Comes in 10m (33') rolls



Benefits:



Certified slip resistant (DIN 51130:RI I, ASTM 1677:0.6/0.6)



Excellent drainage (DIN 51130:VI0)




Chemical, oil and acid resistant



Boosts productivity



Simple to install, easy to clean

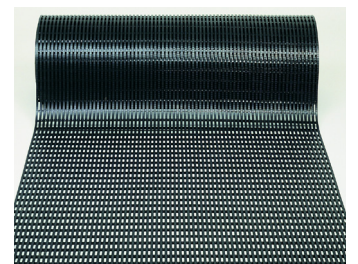

Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured matting products:
plastexmatting.com

Standard sizes:

Product	Heronair
Height	10mm (3/8")
Standard roll options	10 x 0.5m (33' x 1'8") 10 x 0.75m (33' x 2'5") 10 x 1m (33' x 3'3")
Weight	4.5kg/m ² (0.6lbs/sq.ft)

Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
Heronair	10mm	10m	50cm 75cm 100cm

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Heronair is 100% recyclable. When manufactured in black, it's made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products..
Fire	DIN 4102 Part 1 – Classification B2
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Slip resistance	ASTM F 1677- Dry/Wet: 0.6/0.6 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Warranty	Two years. Visit our policies page for more information about warranties

Installation:

Heronair's one-piece construction means installation is simple:


- Comes in 10m rolls
- Easy to cut to fit on site
- Contours to uneven surfaces

Cleaning:

Keeping Heronair looking good is easy:

- Lightweight
- Simply roll or lift to clean
- No special cleaning tools needed
- Easy to clean with a high pressure hose

Colours:




Black

More colours
available
upon request

Ancillaries:


> Heronair

PVC edging (H: 10mm, W: 50mm)



Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging. Comes in black and dark grey. Size: 10mm x 50mm x 10.1m (3/8" x 2" x 33')

PVC snap track (H: 10mm)



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. We recommend one tube of cold welding paste for every 10m of edging. Comes in dark grey. Size: 10.5mm x 2.5m (13/32" x 8'2")

Connector clips: dual purpose (H: 14mm)



For joining sections of matting together side-to-side or end-to-end. Supplied in packs of 10