


Cushioned matting for benches and compartments – perfect for protecting delicate components and surfaces.



Keep tools and fragile equipment free from damage with Pillomat, a multi-purpose surface mat that can be used to line worktops, shelving or compartments.

Made from a tubular construction with air-filled hollow sections, it provides a lightweight surface matting solution that's quick to install, and easy to clean and maintain. The open grid ensures good drainage and fall through, and the non-porous PVC is impermeable to fluids, making it suitable for a wide range of industries, including marine compartments, manufacturing workspaces and production lines.



Features:



Tubular construction



Open grid




Non-porous PVC



Made from flexible PVC



Supplied in 10m (33') rolls

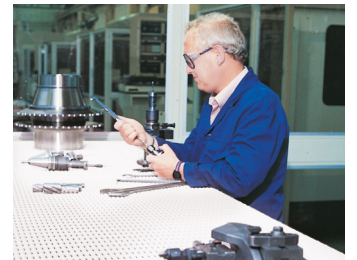

Benefits:



Protects fragile items from damage



Good drainage and fall through



Hygienic and easy to clean



Contours to uneven surfaces



Quick to install



Plastic Extruders Ltd.

Russell Gardens, Wickford
Essex, SS11 8DN
+44 (0) 1268 571 116

UK + USA manufactured
matting products:
plastexmatting.com



Standard sizes:

Product	Pillomat
Height	8mm (5/16")
Standard roll options	10 x 0.6m (33' x 2') 10 x 0.91m (33' x 3')
Weight	3.1 kg/m ² (0.5 lb/sq.ft)

Tolerances:

	Height (+/- 0.5mm)	Length (0+0.3m)	Width (+/- 1cm)
Pillomat	8mm	10m	60cm 91cm

All dimensions are nominal

Technical information:

Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC)
Environment	Pillomat is 100% recyclable. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation.
Warranty	One year. Visit our policies page for more information about warranties

Installation:

Pillomat's one-piece construction means installation is simple:


- Supplied in lightweight 10m rolls
- Easy to cut to size and shape
- Contours to uneven surfaces

Cleaning:


Keeping Pillomat looking good is easy:

- Light to handle
- Simply lift or roll to clean
- No special cleaning tools needed

Colours:




Green



Beige



White



Mahogany

More colours
available
upon request