

Trackgrip




Wide-grid walkway matting specifically designed for greasy or grimy environments.



With its two-layer construction, extra-wide grid and excellent drainage, Trackgrip is the perfect defence against grease, grime and oil.

Made from non-porous PVC with a two-layer construction, Trackgrip is impermeable to fluids and provides excellent drainage, making it ideal for environments where spillages are likely. Its diamond cut pattern provides the highest slip resistance, and the wide grid means it's perfect for environments where oils and greasy materials are present, like railway maintenance areas, construction sites and processing plants.

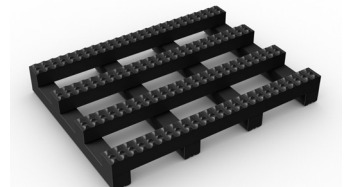

Features:



Diamond cut pattern



Two-layer construction and extra-wide spacing



Made from non-porous PVC



Comes in 10m (33') rolls



Made from flexible PVC



Benefits:



Certified slip resistant (DIN 51130:R11 ASTM 1677:0.9/0.7)



Excellent drainage (DIN 51130:V10)



Resistant to chemicals, acids, oils



Quick to install



Easy to clean with a high pressure hose



Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured matting products:
plastexmatting.com

Standard sizes:

Product	Trackgrip	Trackgrip Plus
Height	15mm (5/8")	15mm (5/8")
Standard roll options	10 x 0.6m (33' x 2')	10 x 0.6m (33' x 2')
	10 x 0.91m (33' x 3')	10 x 0.91m (33' x 3')
	10 x 1.22m (33' x 4')	10 x 1.22m (33' x 4')
Weight	4.6kg/m ² (0.94lb/sq.ft)	4.6kg/m ² (0.94lb/sq.ft)

Tolerances:

	Height (+/- 0.5mm)	Lengths (0+0.3m)	Widths (+/- 1cm)
Trackgrip	15mm	10m	60cm 91cm 122cm
Trackgrip Plus	15mm	10m	91cm 122cm

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Chemical	Resistant to most acids, alkalines and oils. You can read more about specific chemical resistances by downloading this information sheet .
Composition	Flexible Polyvinyl Chloride (PVC).
Environment	Trackgrip is 100% recyclable. When manufactured in black, it's made using our post industrial recycled material. The recycled content averages at least 30%, but we strive for 100% wherever possible. We don't use any substances included in the SVHC list under REACH in any of our matting products.
Hygiene	Made from non-porous PVC that's naturally resistant to bacteria growth.
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet .
Slip resistance	ASTM F 1677 - Dry/Wet: 0.9/0.7 DIN 51130: R11, V10
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Warranty	Three years. Visit our policies page for more information about warranties

Installation:

Trackgrip's one-piece construction means installation is simple:

- Comes in 10m rolls, ideal for covering large areas
- Quick and easy to cut to fit on site
- No special tools needed
- Contours to uneven surfaces

Cleaning:


Keeping Trackgrip looking good is easy:

- Easy to handle
- Roll or lift to clean
- Simply clean with a high pressure hose

Colours:



Black




Black with yellow edging

More colours
available
upon request

Ancillaries:


> Trackgrip

PVC edging (H: 14mm, W: 60mm)




Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging. Comes in black, dark grey, dark brown, holly green, Oxford blue, yellow. Size: 14mm x 60mm x 10.1m (9/16" x 2 1/2" x 33')

Aluminum edging (H: 15mm)



Supplied in sections of 2m (6'6") length with fixing screws and plugs. Comes in anodized aluminum and powder coated yellow. Size: 15mm x 45mm x 2m (5/8" x 1 13/16" x 6'6")

Small floor hook (H: 14mm)



For securing sections of matting to the floor. Supplied in packs of 20 with screws and plugs.