
Tuff Spun Deck




Heavy-duty, anti-fatigue foam matting for extra traction in industrial and commercial workplaces.

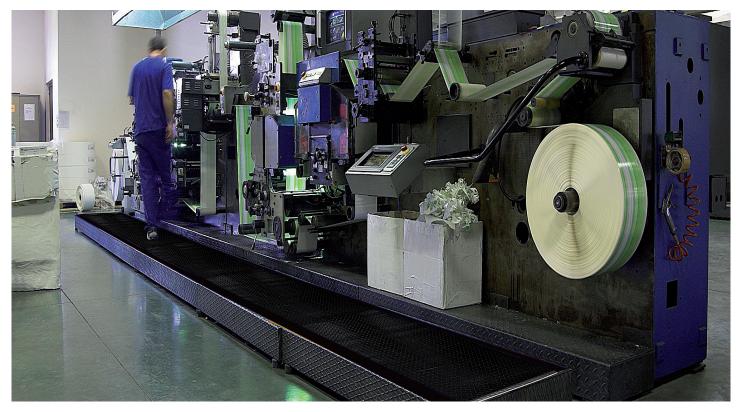

Our popular Tuff Spun matting also comes in a heavy-duty version with extra cushioning and added traction - ideal for commercial and industrial workplaces where employees need both comfort and slip resistance.

The 14mm thick foam layer delivers extra cushioning, while the embossed checker plate provides added traction, abrasion and puncture resistance. Certified wear resistant, this anti-fatigue matting reduces standing fatigue and boosts productivity.



Features:









Embossed surface Checker-plate design



14mm (9/16'') thickness



Comes in 18m (60') rolls and standard modules



Benefits:



Certified wear resistant (ASM 4060: <0.2g loss)



Good slip resistance



puncture resistance



Added abrasion and Extra cushioning to improve comfort



Quick to install



Plastex Matting Inc.

Tuff Spun Deck

Data sheet



Standard sizes:	
Product	Tuff Spun Deck
Height	14mm (9/16'')
Standard roll option	18 × 0.9 lm (60' × 3')
Standard module options	0.6 × 0.9 lm (2' × 3')

 $0.91 \times 1.5 \text{m } (3' \times 5')$ $0.91 \times 3 \text{m } (3' \times 10')$ Weight 4 kg/m2 (0.74 lbs/sq.ft.)

Surface modules are supplied with factory fitted PVC ramped edging to four sides

Tolerances:

	Height (+/- 0.5mm)	Lengths (0+0.3m)	Widths (+/- 1cm)
Tuff Spun Deck	14 mm	18 m	91 cm

All dimensions are nominal

Acoustic	Excellent sound absorption
Composition	Vinyl foam/vinyl wear layer.
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
Wear rating	ASTM 4060: <0.3g loss.
Warranty	One year. Visit our policies page for more information about warranties

Installation:

Tuff Spun Deck's one-piece construction means installation is simple:

- Comes in rolls or modules for quick installation
- Easy to cut to size and shape
- No special tools needed

Cleaning:

Keeping Tuff Spun Deck looking good is easy:

- Light to handle
- Simply lift or roll to clean
- Easy to clean with a high pressure hose

Colours:



Black

More colours available upon request

Tuff Spun Wear

Data sheet



Ancillaries:

> Tuff Spun Wear

PVC edging (H: 10mm, W: 60mm)



Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging.

Comes in black and dark grey.

Size: 10mm × 60mm × 10.1m (9/16" × 2 1/2" × 33')

PVC snap track (H: 10mm)



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. We recommend one tube of cold welding paste for every 10m of edging. Comes in dark grey. Size: 10.5mm × 2.5m (13/32" × 8'2")