

Tuff Spun




Anti-fatigue, noise-reducing foam matting for light duty use.



With its ribbed slip-resistant surface and foam composition, Tuff Spun is ideal for workplaces with employees who need comfort underfoot.

Certified wear resistant, this anti-fatigue matting not only reduces standing fatigue and boosts productivity, it also reduces impact noise and provides protection against anything that might be accidentally dropped.



Features:



Made from industrial sponge construction




Ribbed surface



PVC foam construction



Closed cell construction



Comes in 18m (60') rolls and standard modules



Benefits:



Certified wear resistant (ASTM 4060: < 1g loss)



Good slip resistance




Reduces noise and standing fatigue



Protects dropped items from damage



Quick to install

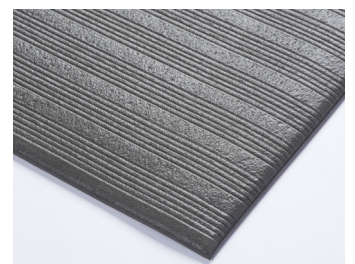

Plastex Matting Inc.

120 55th St NE
Fort Payne, AL 35967
+1 256 845 7725

USA + UK manufactured
matting products:
plastexmatting.com

Standard sizes:

Product	Tuff Spun in grey	Tuff Spun in black	Tuff Spun Plus
Height	9mm (3/8")	9mm (3/8")	9mm (3/8")
Standard roll options		18 x 0.6m (60' x 2')	
	18 x 0.91m (60' x 3')	18 x 0.91m (60' x 3')	18 x 0.91m (60' x 3')
		18 x 1.22m (60' x 4')	
Standard module options	0.6 x 0.91m (2' x 3')		0.6 x 0.91m (2' x 3')
	0.91 x 1.5m (3' x 5')		0.91 x 1.5m (3' x 5')
	0.91 x 3m (3' x 10')		0.91 x 3m (3' x 10')
Weight	3.3kg/m2 (0.68lbs/sq.ft.)	3.3kg/m2 (0.68lbs/sq.ft.)	3.3kg/m2 (0.68lbs/sq.ft.)

Surface modules are supplied with factory fitted PVC ramped edging to four sides

Tolerances:

	Height (+/- 0.5mm)	Lengths (0+0.3m)	Widths (+/- 1cm)
Tuff Spun	9 mm	18 m	60 cm 91 cm 122 cm
Tuff Spun Plus	9 mm	18 m	91 cm

All dimensions are nominal

Technical information:

Acoustic	Excellent sound absorption
Composition	Vinyl foam
Reversion	Thermoplastic shrinkage can result in size reductions up to 2%. This may be accelerated in hot environments. You can read more about the causes of shrinkage by downloading this information sheet
Thermal	Designed to function at temperatures from -23°C and up to +60°C. Slight size variation may occur at temperature extremes.
UV light	Resistant to PVC degradation
Wear rating	ASTM 4060: < 1g loss.
Warranty	One year. Visit our policies page for more information about warranties

Installation:

Tuff Spun's one-piece construction means installation is simple:

- Comes in rolls or modules for quick installation
- Easy to cut to size and shape
- No special tools needed

Cleaning:

Keeping Tuff Spun looking good is easy:

- Light to handle
- Simply lift or roll to clean
- Easy to clean and maintain

Colours:



Dark grey



Black




Black with yellow edging

More colours
available
upon request

Ancillaries:


> Tuff Spun

PVC edging (H: 10mm, W: 50mm)



Supplied in rolls of 10.1m (33') length. One tube of cold welding paste recommended for every 10m of edging. Comes in black and dark grey. Size: 10mm x 50mm x 10.1m (3/8" x 2" x 33')

PVC snap track (H: 10mm)



Two-part snap track that can be welded together to join rolls end-to-end or side-to-side to cover large areas. We recommend one tube of cold welding paste for every 10m of edging. Comes in dark grey. Size: 10.5mm x 2.5m (13/32" x 8'2")