

# FLEXI BUTTON

## Heavy duty deep stud floor covering

A multi-purpose, heavy duty sheet vinyl for commercial and medium duty industrial applications.

The distinctive deep stud design is not only an attractive feature but also a practical one. Flexi Button is easy to clean, slip resistant, chemical, oil and acid resistant and formulated to cope with light spillages.



### BENEFITS

- Good slip resistance and hardwearing
- Chemical, oil and acid resistant
- Easy to cut on site, contours to uneven surfaces
- Quick to install
- Fire resistant

### FEATURES

- Deep stud design
- Vinyl sheets in roll format
- Made from flexible PVC
- Supplied in convenient roll formats
- EN 13501 - 1 : 2007- Bfl - S1

### STANDARD COLOURS




BLUE

DARK GREY

BLACK

### STANDARD SIZES

PRODUCT	HEIGHT	STANDARD ROLL OPTION
Flexi Button	3.3mm (1/8")	20 x 0.98m (65' 7" x 3' 2")

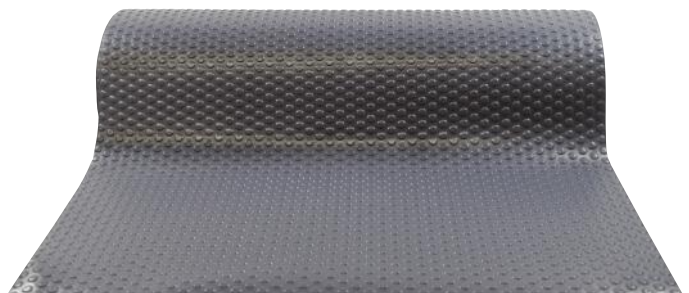

# PRODUCT DATA SHEET: Flexi Button

Apr-17

## SIZES & WEIGHTS

<i>All dimensions are nominal</i>	Height (mm)	Lengths (m)	Widths (cm)	Weight (kg/m <sup>2</sup> )
<i>Tolerances (mm)</i>	<i>+/- 0.5</i>	<i>0+0.3</i>	<i>+/- 1</i>	
Flexi Button	3.3	20	98	4.29



## GENERAL

APPEARANCES	Heavy duty deep stud pattern on a continuous sheet format.
COLOURS	Black, Dark Grey, Blue
DURABILITY	Continuous extruded sheet with high scuff resistance.
WORKABILITY	Available in rolls for ease of installation. Easy to cut to size and shape.
USES	Indoor or outdoor use for floor protection and floor enhancement.

## TECHNICAL DATA

CHEMICAL	Resistant to most acids, alkalines and oils. For specific chemical resistances, <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/pvc-chemical-resistance.pdf</a>
COMPOSITION	Flexible DINP plasticised Polyvinyl Chloride (PVC).
FIRE	EN ISO 13501 - I : 2007 - Bfl - S1
REVERSION	Thermoplastic shrinkage can result in size reductions up to 2%. Accelerated in hot environments. Refer to <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/vinyl-matting-dimensional-stability.pdf</a>
THERMAL	Functional -23°C +60°C (slight size variation may occur at temperature extremes).
UV LIGHT	Resistant to PVC degradation; uncoloured PVC material - BS EN 607 = Delta E 1.02.
WARRANTY	2 years. See <a href="http://www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf">www.plastexmatting.com/uploads/4/4/0/0/44003899/warranty.pdf</a>